

Experimental Study on Flexural Behaviour on various Fibre Reinforced Concrete Beams

¹Kathirvel M, ²Naveenkumar

¹Assistant Professor, Adhiyamaan College of Engineering, Hosur

²PG Student, Adhiyamaan College of Engineering, Hosur

Abstract

Concrete is a key ingredient that forms a major ingredient for all prestresses and prefabricated structural elements. For all structures are planned with a fine slenderness ratio. To achieve High-Performance Concrete, Fiber-reinforced Concrete is the effective medium to achieve considerable improvement in strength aspects. To compare the best FRC, we are comparing the strength behavior & good composition results of various metallic and synthetic FRCs from works of literature. And the results of FRC with the best composition were taken to find the best FRC with specified strength. Finally Fibre Reinforced beams are casted, cured and tested for its flexural strength and its respective deflections were noted and compared.

Keywords: FRC, Steel fibre, Glass fibre, Nylon Fibre, fibre reinforced concrete beams

I. INTRODUCTION

Concrete is one of the most widely used construction material in the world, it is usually associated with Ordinary Portland Cement (OPC) as the main component for making concrete, also fine aggregate and coarse aggregate. Concrete made with Portland cement has certain characteristics. It is relatively strong in compression but weak in tension and tends to be brittle. These two weaknesses have limited its use. Another fundamental weakness of concrete is that cracks start to form as soon as concrete is placed and before it has properly hardened. These cracks are the main reason for weakness of concrete in various factors and may lead to failure of structure and affects durability factor. These deficiencies may able to overcome by the use of fibers. Extensive research work on FRC during the last two decades has established that combination of two or more types of fibres such as metallic and non-metallic fibers increase overall performances of concrete. In Past, a lot of experimental work was carried out on fiber reinforced concrete having different types of fibers to study their

improved engineering properties in compressive strength, tensile strength, flexural strength, etc., The fibers are able to prevent surface cracking through bridging action leading to an increased impact resistance of concrete. Most of the fibers used in practice contain one type of fiber or more than one type of fiber. Recent years have seen considerable interest in the fiber hybridization particularly combinations of metallic and non-metallic fibers. For optimal behavior, different types of metallic and non-metallic fibers are to be combined.

The mechanical properties such as compressive strength, flexural strength and flexural toughness etc., And also its being to be achieved using M-Sand instead of River Sand for natural resources conserving concern.

Inclusion of Fibers in concrete improve tensile and compressive strength due to bridging action of fibers. Large amount of studies proved that fiber reinforcement increases the strength significantly.

The direct CO₂ intensity of cement production increased 1.8% per year during 2015-2020. Demand for cement in the construction industry drives production and is thus an important determinant of cement subsector energy consumption and CO₂ emissions.

In order to achieve less CO₂ emission through lesser use of concrete, High performance concrete is mandate one. With fiber reinforcements, serviceability gets increased with good tensile and compressive strengths. In this project we are going to analyse the strength and composition factors of concrete reinforced with fibres like Steel fiber, Nylon fiber, Glass fiber, and Polypropylene fiber.

Our objectives are

- ✓ To Study And Choose The Best Performed Frc Mixtures And Its Optimal Percentile Blending.
- ✓ To Prepare a High Performance Fiber Blended Concrete Beams.
- ✓ To Compare the Flexural Strength and deflection of various fiber blended concrete beams.


II. THEORETICAL CONCLUSION FROM THE LITERATURE

From the above Literatures, the following conclusions were made.

- ✓ The Literatures proved that fibre reinforcement increases the compressive strength as well as tensile strength of concrete as compared to conventional concrete.[10]
- ✓ The steel fibre reinforcement in concrete increases


the compressive strength of concrete & considerably the tensile strength. The fibre addition of 1.25% to the volume of cement gives the considerable result of increasing the strength.[6]

- ✓ The Polypropylene fibre reinforcement in concrete increases the compressive strength of concrete & considerably the tensile strength. The fibre addition of 0.5% to the volume of concrete yield higher flexural strength[3]
- ✓ The Nylon fibre reinforcement in concrete increases the compressive strength of concrete & considerably the tensile strength. The fibre addition of 1% to the volume of concrete gives the considerable result of increasing the strength about 27%
- ✓ The glass steel fibre reinforcement in concrete increases the compressive strength of concrete & considerably the tensile strength. The fibre addition of 1 % to the volume of concrete gives the considerable result of increasing the strength about 15%
- ✓ The glass steel fibre reinforcement in concrete increases the compressive strength of concrete & considerably the tensile strength. The fibre addition of 1.0 % to the volume of cement gives the considerable result of increasing the strength[8]

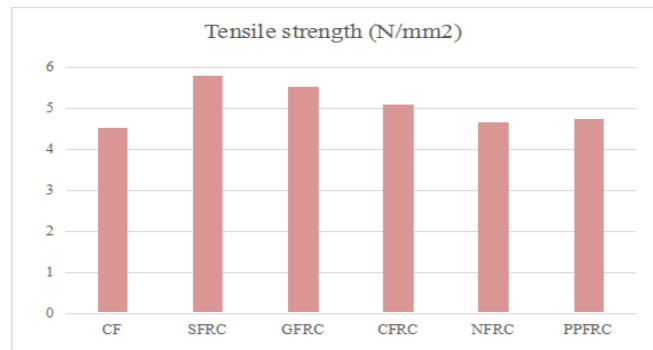

FLEXURAL TEST RESULTS ON BEAM SPECIMENS

The deflection of beam was found out by using 100Ton loading frame. The deflection of beam is found out with respect to the load increment. And figure shows the graph plotted for load and deflection for each mix.

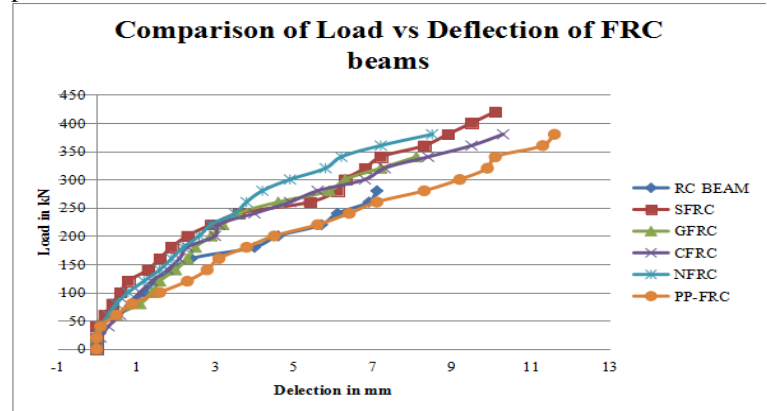


Load Vs. Deflection curve comparison for all beam specimens

III. SPECIMEN CASTING AND EXPERIMENTAL RESULTS

A total of 18 cubes, 18 prisms and 18 beams were casted and tested, and there compressive strength, split tensile strength and flexural strength results have been taken for M 25 grade design mix.

Compressive Strength for Cubes at 28 days Test for M 25

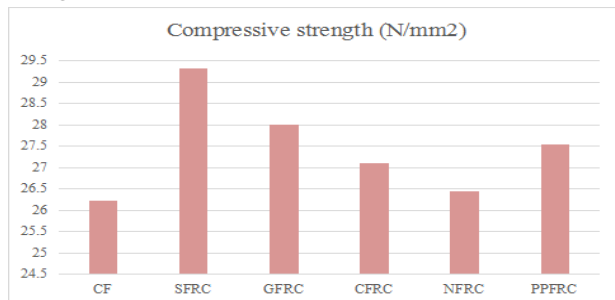

Split Tensile Strength for Cylinders at 28 days test for M 25

IV. CONCLUSION

- ✓ The Slump cone test and Compaction factor results showed that thereby no significant changes are known in Conventional Concrete and Fibre Reinforced Concrete except Steel Fiber Reinforced Concrete while using Manufactured Sand as alternative for river sand.
- ✓ The basic properties of Steel, Carbon, Glass, Nylon and Polypropylene fibers was studied.
- ✓ On comparing various Specimens, the mechanical properties of Steel fibre reinforced concrete is increased by 12% in Compression and by 28% Split tensile than the control mix strength.
- ✓ On comparing various Specimens, the mechanical properties of Glass fibre reinforced concrete is increased by 7% in Compression and by 22% Split tensile than the control mix strength.
- ✓ On comparing various Specimens, the mechanical properties of Carbon fibre reinforced concrete is increased by 3% in Compression and by 13% Split tensile than the control mix strength.
- ✓ On comparing various Specimens, the mechanical properties of Nylon fibre reinforced concrete is

increased by 1% in Compression and by 3% Split tensile than the control mix strength.

- ✓ On comparing various Specimens, the mechanical properties of Polypropylene fibre reinforced concrete is increased by 5% in Compression and by 5% Split tensile than the control mix strength.
- ✓ The steel fiber reinforced concrete beam shows higher resistance to loads and as well gives maximum deflection when compared to conventional and other fibre reinforced concrete beams
- ✓ It was found that steel fibre reinforced concrete gives us the considerable strength while comparing all other fibre reinforced concrete specimens.

V. REFERENCES

- [1] Selina Ruby G., Geethanjali C., Jaison Varghese, P. Muthu Priya, Sri Krishna College of Technology, Coimbatore, "Influence of Hybrid Fiber on Reinforced Concrete", International Journal of Advanced Structures and Geotechnical Engineering ISSN 2319-5347, Vol. 03, No. 01, January 2014.
- [2] P.S. Song*, S. Hwangb, B.C. Sheuba, Dahan Institute of Technology, "Strength properties of nylon- and polypropylene-fiber-reinforced concretes" Sincheng, Hualien 971, Taiwan, R.O.C.
- [3] Ahsana Fathima K M & Shibi Varghese PG Student, Department of Civil Engineering, Mar Athanasius College of Engineering Kothamangalam, Ernakulam.
- [4] Pravin B. Shinde, Sangita V. Pawar, V. P. Kulkarni, "Flexural Behavior of Hybrid Fiber Reinforced Concrete Deep Beam and Effect of Steel & Polypropylene Fiber on Mechanical Properties of Concrete, IJARSE, Vol. No.4, Issue No.02, February 2015.
- [5] Priyanka Dilip.P and K.Remadevi, "A Study on Properties of Hybrid Fiber Reinforced Concrete", IJSHRE, Volume 2 Issue 3, March 2014.
- [6] P. Casanova and P. Rossi, "Can steel fibers replace transverse reinforcements in reinforced concrete beams?" ACI Materials Journal, vol. 94, no. 5, pp. 341–351, 1997.
- [7] Kathirvel.M and Selvi.K, "Experimental study on the stuffs of Hybrid Fiber Reinforced Concrete," International Journal Of Intelligence Research (IJOIR), Vol. 7, pp.976-979, January - June 2016.
- [8] Faezeh Faghieh* Ashraf S. Ayoub, "Structural performance of steel-concrete sandwich beams with carbon nanofiber reinforcement", Engineering Structures 187 (2019) 177–198
P. K. N and K. M, "FLEXURAL RESPONSE OF HYBRID FRC BEAMS", IJTIMES, vol. 4, no. 3, pp. 98–103, Mar. 2018.
- [9] P. Mahakavi a,† , R. Chithra b , Ripunjoy Gogoi a , N. Divyah b, "Effect of recycled aggregate and flyash on glass fiber reinforced concrete", Materials Today: Proceedings
- [10] Mahdi Nematzadeha Alireza Maghferatb Morteza Rezaei Zadeh Herozic, "Mechanical properties and durability of compressed nylon aggregate concrete reinforced with Forta-Ferro fiber: Experiments and optimization" Journal of Building Engineering 41 (2021) 102771
- [11] Shetty M. S., Concrete Technology-Theory and Practice", S. Chand and Company, New Delhi, (1982), pp 526 & 528.
- [12] Abdelhak Boussetlam and Omar Chaallal, "Behavior Of Reinforced Concrete T-Beams Strengthened In Shear With Carbon Fiber-Reinforced Polymer— An Experimental Study", ACI Structural Journal, title no.103-S35, May-June 2006.
- [13] B.V.Venkatarama reddy, "Suitability of M-Sand as Fine Aggregate in Mortars and Concrete", Department of mines and geology, IISc., January 2012.
- [14] Amit Rana, Some Studies on Steel Fiber Reinforced Concrete, International Journal of Emerging Technology and Advanced Engineering, Volume 3, Issue 1, January 2013.
- [15] C. Chandra et al, Flexural behavior of solo and hybrid fibre concrete- a comparative study, International Journal of Engineering Sciences & Research Technology, Vol. 2 Issue7, July 2013.
- [16] IS 456 – 2000, "Plain and reinforced concrete –code of practice", Bureau of Indian Standards, New Delhi, India.
- [17] IS 516 – 1959 (2004), "Method of tests for strength of concrete", Bureau of Indian Standards, New Delhi, India.
- [18] IS 383 – 1970 (2002), "Specification for coarse and fine aggregates from natural sources for concrete", Bureau of Indian Standards, New Delhi, India.